

Flowchem VE RC (0.5 - 1 mm)



Description

A roller coat shrinkage compensated vinyl ester resin based coating system with excellent chemical and mechanical resistance.

Applied between 0.5 and 1mm thick.


Uses

For protection of concrete walls, floors, kerbs, equipment bases, trenches and drains against aggressive chemicals, solvents and heavy duty mechanical plus thermal attack.


Benefits

- Excellent thermal resistance, up to 145°C.
- Excellent chemical resistance.
- Fast curing – usually walk on within 12 hours.
- Hygienic – easy to clean.
- High abrasion resistance.
- UV resistant.
- Each installation matched to clients specific requirements.

Standard colour chart



Red (close to RAL 3009)



Light Grey (close to RAL 7035)



Green (close to RAL 6002)




Dark Grey (close to RAL 7046)

The applied colours may differ slightly from the examples shown above. Contact our customer services for a true colour sample.

System Design

Optional non-slip finish

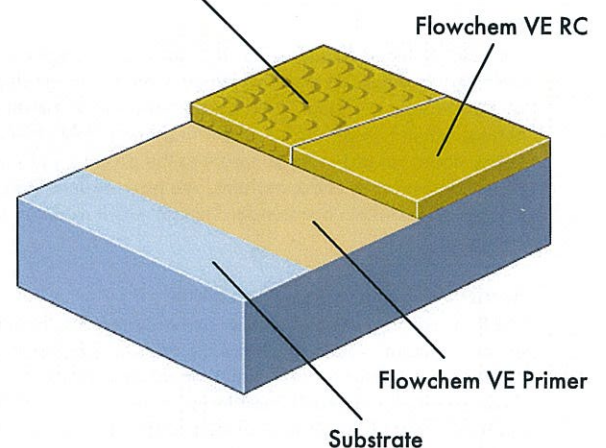

Model Specification

Product: Flowchem VE RC

Finish: Satin matt

Thickness: _____ 0.5 – 1.0 mm dry film thickness

Colour: _____

Preparatory work and application in accordance with suppliers instructions.

Supplier: Flowcrete UK Ltd

Telephone : Customer Service - +44 (0) 1270 753000

Substrate Requirements

Reinforced concrete substrates should be capable of producing 1.5 N/mm² "pull-off" values and, following preparation, be free from laitance, dust and other contamination. The substrate should be visibly dry with a moisture content not exceeding 5% by weight, or 75% RH as per BS8204, and free from rising damp and ground water pressure. If no damp proof membrane is present, use one coat of Hydraseal DPM and one coat of Flowfresh Primer directly beneath the Flowchem VE system.

Products Included in this System

Primer: Flowchem VE Primer @ 0.35 kg/m²

Finish: Flowchem VE RC @ 0.7 kg/m²,
applied in 2 – 3 coats
for ~0.5 mm dry film thickness

Note: Add Flowchem VE Topcoat Additive to the final topcoat only at 1.5% by weight of Resin.

The Flowchem VE topcoat resins normally give a glossy finish. When the Flowchem VE Topcoat Additive is used, the resultant finish is a satin matt.

Non-slip finishes: Various grades of quartz can be incorporated to provide a textured surface.

NB: Specifications are written for each installation to meet the clients particular requirements.

Installation Service

The installation should be carried out by a Flowcrete approved contractor with a documented quality assurance scheme. Obtain details of our approved contractors by contacting our customer service team or enquiring via our web site www.flowcrete.co.uk

Note

No resin system is totally colour fast and may change colour over time (exhibits a yellowing effect). Colour change depends on the UV light and heat levels present and hence the rate of change cannot be predicted. This is more noticeable in very light colours but does not compromise the product's physical or chemical resistance characteristics. We have endeavoured to adopt colours within our standard range which minimise this change.

Environmental considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

Flowcrete UK Ltd
The Flooring Technology Centre Booth Lane
Sandbach Cheshire CW11 3QF UK.
Tel: +44 (0) 1270 753000 Fax: +44 (0) 1270 753333
Email: uk@flowcrete.com
Flowcrete UK Ltd is an RPM company

Technical Information

The figures that follow are typical properties achieved in laboratory tests at 20 °C and at 50% Relative Humidity. A range is given to cover results from the various systems.

Temperature Resistance Tolerant up to 145 °C (ASTM D 648-56)

Slip Resistance Dry >40 low slip potential
Method described in BS 7976-2 (in accordance with HSE and UKSRG
(typical values for 4-S rubber slider) guidelines)

The slipperiness of flooring materials can change significantly, due to the installation process, after short periods of use, due to inappropriate maintenance, longer-term wear and/ or surface contaminants (wet or dry).

Textured systems are recommended to meet slip resistance value requirements for wet conditions and/ or surface contaminants (wet or dry) - please contact our Technical Advisors for further details and specifications.

Chemical Resistance	Contact Technical Department
Barcol hardness	> 40 (ASTM 2583)
E-Modulus	3.1 GPa (ASTM D 695)
Volume Shrinkage	< 0.004 % Rill 4 2.5.3.2.1
Flexural Strength	125 MPa (ASTM D 790)
Tensile Strength	73 MPa (ASTM D 638)
Adhesion	> 4 MPa (Note: substrate failure)
Density	1.07

Speed of Cure	20 °C
Light traffic	12 hours
Full traffic	24 hours
Full chemical cure	72 hours

The speed of cure can be controlled to a large extent by varying the accelerator concentration.

Aftercare - Cleaning and Maintenance

Clean floors regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

Important Notes

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

Any suggested practices or installation specifications for the composite floor or wall system (as opposed to individual product performance specifications) included in this communication (or any other) from Flowcrete UK Ltd constitute potential options only and do not constitute nor replace professional advice in such regard. Flowcrete UK Ltd recommends any customer seek independent advice from a qualified consultant prior to reaching any decision on design, installation or otherwise.

Model Specification written for Flowcrete UK Ltd.
Please consult Technical Team in own country region for specific details.

www.flowcrete.co.uk